


# Space-saving model can be installed on the wall.


## Control panel and operation panel are easy-to use

Compact & sleek design.  
Minimal space required for installation.

### • Control panel

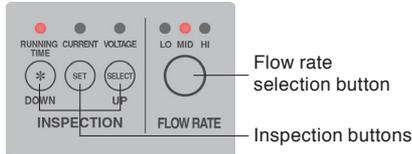


### • Operation panel

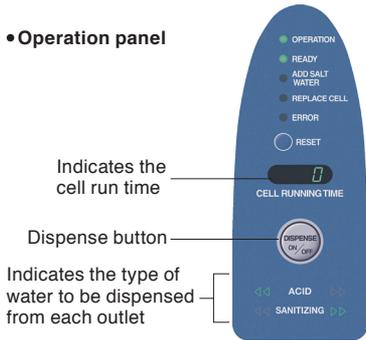

## Sanitary touch-less operation

Built-in touch-less sensor activates & dispenses electrolyzed water when hand approaches.



## Flexible nozzle with high work efficiency

Flexible nozzle can adjust the dispensing angle.  
The STRAIGHT outlet can be replaced with the SHOWER.



## Installation example



## ROX-10WB3-EW

ITEM	Hoshizaki Water Electrolyzer	
MODEL	ROX-10WB3-EW	
POWER SUPPLY	1 Phase 220-240V 50/60Hz 0.6kVA	
AMPERAGE	2.0A	
ELECTRIC CONSUMPTION	170W	
STANDARD PERFORMANCE	PRODUCTION RATE	Sanitizing/Cleaning Water : 1.5L/min or less
	AVAILABLE CHLORINE	Sanitizing Water : 10-60mg/kg
	pH	Sanitizing Water : 5.0 or less, Cleaning Water : 10.5 or more
OUTSIDE DIMENSIONS	350mm x 174mm x 340mm	

## Sanitizing water reference performance

PRODUCTION RATE SETTING	Hi	Mid	Lo
PRODUCTION RATE (L/min)	1.5	1.0	0.7
pH	3.0	3.0	3.0
AVAILABLE CHLORINE (mg/kg)	30	40	50

- \* Add one cup of salt(800g) and water(5L) into the salt water tank(accessory).
- \* Operation time per salt water tank is about 5hrs.
- \* Salt: min. purity 99%
- \* Water softener is required.



# ROX

Safe &  
Effective  
Operation

Simple and controlled sanitary management. Hoshizaki Acidic Water Electrolyzer is easy-to use.

Sanitizing water

approx. 1.0 ~ 2.1t/day

Cleaning water

approx. 1.0 ~ 2.1t/day

Hoshizaki Water Electrolyzer  
**ROX-10WB3-EW**

**HOSHIZAKI**