HOSHIZAKI

DIM-40DE-HC

Cube ice dispenser

Production Capacity (kg/24h) - AT 10°C, WT 10°C: 43
Storage bin capacity: 15 kg

PRODUCT SERIES: DIM 40
COUNTRY OF ORIGIN: UK




The DIM-40DE-HC produces cubed ice, in the most popular sizeof 28 x 28 x 32 mm, slow-melting and much appreciated for itsmaximum cooling and minimal drink dilution.

Freshly produced ice cubes remain well protected in the icestorage area from contaminants, dust and light, hence maintainingthe highest quality. Cubes are dispensed automatically andhygienically by pressing the actuator button, conveniently locatedon the ice-dispensing panel. A dispense opening of over 20 cmallows for ample clearance for ice containers positioning. Icecubes spillage is minimized by the large drain pan, for easy andproblem-free ice dispensing.

- Natural refrigerant R290 Hydrocarbon.
- Louvered front access for condensing air circulation (front intake, back exhaust)
- Easily accessible and removable air filter
- Slim-line dimensions allow for ease of recessed or built-in installations
- Front panel positioned, recessed and protected On-Off switch
- Adjustable legs
- Safety: IEC Conform to the standard

ICE TYPE: Large cubes, Standard





WARRANTY PERIOD
3 Years on Parts & Labour - based on country agreement

EXTERIOR
Acrylic Baked Steel (Cabinet), ABS Molding (Front and Back Panel)

Refrigerant type: R290 / Refrigerant: 0,075 kg /
CO2 equivalent: 0,225 kg

OPERATING CONDITIONS


Ambient temperature (minimum): 1 °C, Ambient temperature (maximum): 40 °C, Water supply pressure (minimum): 0.07MPa (0.7bar), Water supply pressure (maximum): 0.8MPa (8bar), Water supply temperature (minimum): 5 °C, Water supply temperature (maximum): 35 °C, Voltage range (Rated Voltage): ±6%/10%

ACCESSORIES INCLUDED

Installation kit, Mounting Brace (Wall Mounting) , Legs


CERTIFICATIONS





HOSHIZAKI

DIM-40DE-HC

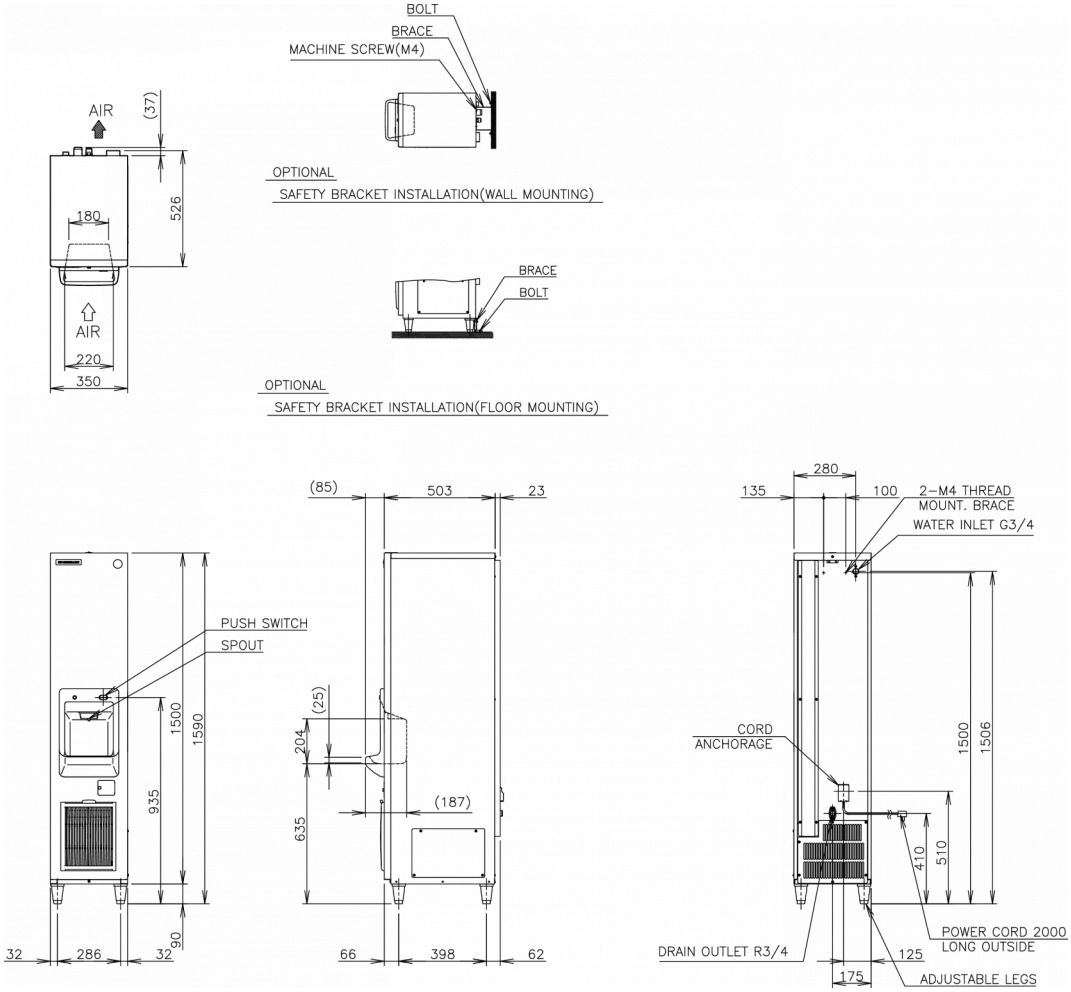

TECHNICAL SPECIFICATIONS

Cooling system	Power supply	Electric Consumption	Electrical circuit breaker protection	Heat Rejection (AT 32°C, WT 21°C)	Production Capacity (kg/24h) - AT 10°C, WT 10°C	Production Capacity (kg/24h) - AT 21°C, WT 15°C	Production Capacity (kg/24h) - AT 32°C, WT 21°C	Water consumption (m3/24h) - AT 10°C, WT 10°C
Air Cooled	1/220 - 240V/50Hz	0,28 kW	5 A	0,71 kW	43	37	30	0,22

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Height including legs (minimum)	Height including legs (maximum)	Net weight
450 mm	730 mm	1.666 mm	0,547 m3	70 kg	350 mm	526 mm	1.500 mm	1.590 mm	1.635 mm	59 kg

HOSHIZAKI HONG KONG CO., LTD.

Showroom and Customer Service Centre
Unit G, 17/F, World Tech Centre,
95 How Ming Street,
Kwun Tong, Kowloon,
Hong Kong

Sales WhatsApp : 6125 3635
Service WhatsApp : 6160 2108
Email: info@hoshizaki.com.hk
www.hoshizaki.com.hk

WEBSITE FACEBOOK INSTAGRAM