


HOSHIZAKI

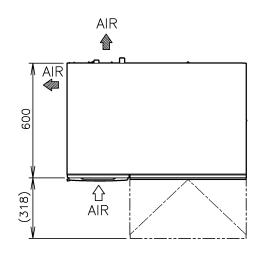

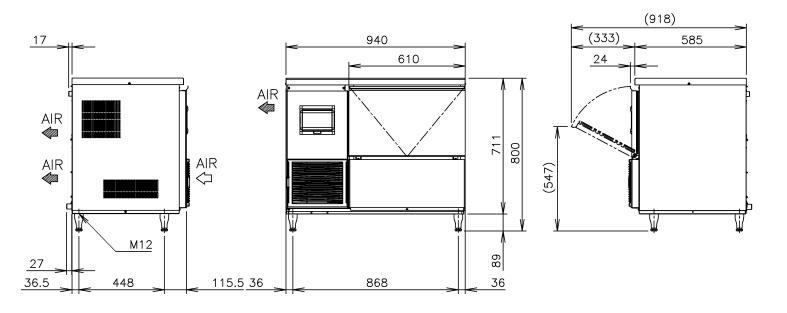

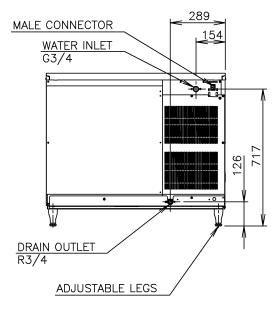

	ITEM	HOSHIZAKI FLAKE ICE MAKER	
	MODEL	FM-150KE-50	
	POWER SUPPLY	1 Phase 220—240V 50Hz Capacity: 1.46kVA (6.4A)	
\triangle	AMPERAGE	5.0A Starting: 20A	
	ELECTRIC CONSUMPTION	Rated Motor: 640W (Power Factor: 58%)	
	ICE PRODUCTION PER 24h	Approx. 150kg (AT.10° C, WT. 10° C) Approx. 130kg (AT.21° C, WT. 15° C) Approx. 110kg (AT.32° C, WT. 21° C)	
	SHAPE OF ICE	Flake	
	MAX. STORAGE CAPACITY	Approx. 57kg—Leveled (Bin Control Setting Approx. 41kg)	
	WATER CONSUMPTION PER 24h	Approx. 0.15đm (AT.10° C, WT. 10° C) Approx. 0.13đm (AT.21° C, WT. 15° C) Approx. 0.11đm (AT.32° C, WT. 21° C)	
	OUTSIDE DIMENSIONS	940mm (W) × 600mm (D) × 800 (798–833)mm (H)	
	INSULATION FOAM BLOWING AGENT	HFC-free	
	HEAT REJECTION	1120W (AT.32°C, WT. 21°C)	
	CABINET	Stainless Steel, Galvanized Steel (Rear)	
	ICE MAKING SYSTEM	Thin ice forming inside Cylinder (Flake Ice)	
	WATER SUPPLY SYSTEM	Direct Connection to Water Main, Inlet: G3/4 (Rear)	
	DRAIN SYSTEM	Outlet: R3/4 (Rear)	
	COMPRESSOR	Hermetic	
	CONDENSER	Fin and Tube type, Air—cooled	
	EVAPORATOR	Tube coiled around Cylinder (Solder Plated)	
	REFRIGERANT	R134a/220g	
	BIN CONTROL	Actuator and Reed Switch (Time delay controlled)	
	ICEMAKING WATER CONTROL	Float Switch and Solenoid Valve	
	ELECTRICAL CIRCUIT PROTECTION	10A Circuit Breaker	
	REFRIGERANT CIRCUIT PROTECTION	Compressor Internal Thermostat	
-	MECHANISM PROTECTION	Condensing Temperature detected by Thermistor (Auto-reset) Micro switch (Manual-reset)	
-	INTERLOCK	Shutdown by Microprocessor (Manual-reset)	
	WEIGHT	Net: 81kg (Gross 94kg)	
	PACKAGE	Carton 1046 (W) x 706 (D) x 887mm (H)	
ļ	ACCESSORIES	Scoop, Installation Kit	
	OPERATING CONDITIONS	Ambient Temp. : 5—40° C, Water Supply Temp. : 5—35° C Water Supply Pressure: 0.05—0.8MPa, Voltage Range: Rated Voltage ± 10%	
*	*We reserve the right to make changes in specifications and design without prior notice.		

1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided.

2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.

3. Product Code: F080-C127