




HOSHIZAKI

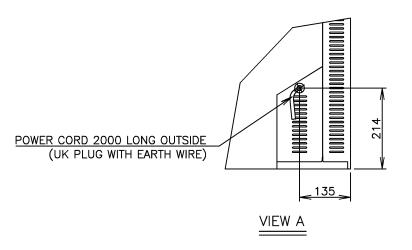





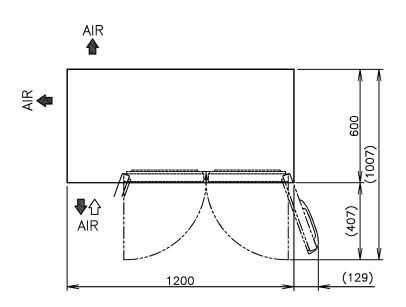

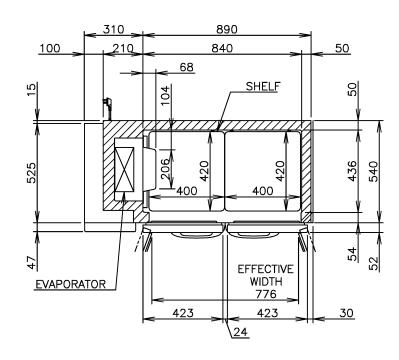

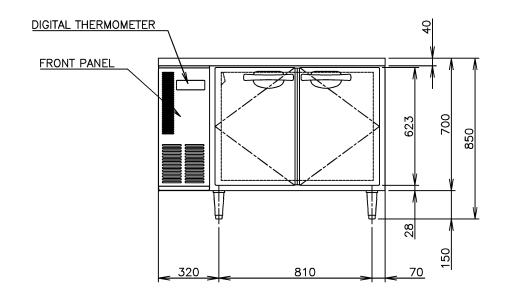

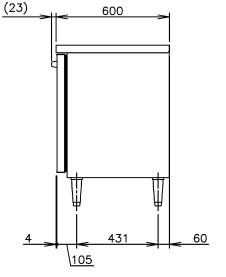

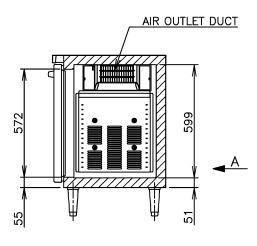

	ITEM	Hoshizaki Undercounter Refrigerator								
	MODEL	RT-126MA-S-ML								
Λ	POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.5kVA (2.5A)								
	AMPERAGE	Rated 2.0A								
\triangle	ELECTRIC CONSUMPTION	Motor 240W Heater 192W Refrigeration 245W Defrost 165W								
	HEAT REJECTION	*W								
	POWER CORD	2.0m (UK Plug with Earth Wire)								
	EFFECTIVE CAPACITY	231L								
	OUTSIDE DIMENSIONS	1200mm (W) x 600mm (D) x 850(-880) mm (H)								
	INSIDE DIMENSIONS	840mm (W) x 436mm (D) x 599mm (H)								
	EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)								
	INTERIOR	Stainless Steel, ABS Plastic (Door)								
	INSULATION	Polyurethane Foam								
	INSULATION FOAM BLOWING AGENT	Cyclopentane								
	REFRIGERATION SYSTEM	Forced Air Circulation								
	DEFROST SYSTEM	Glass Tube Heater								
	COMPRESSOR	Hermetic								
	CONDENSER	Wire and Tube type, Air—cooled								
	EVAPORATOR	Fin and Tube Type								
	REFRIGERANT	R134a								
	TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -6 to 12°C								
	DEFROST CONTROL	Microprocessor controlled								
	ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire								
	COMPRESSOR PROTECTION	Motor Protector								
	LEG	Plastic Adjustable 150 to 180mm								
	SHELF	4pcs.								
	WEIGHT	Net: 71kg (Gross: Approx. 76kg)								
	PACKAGE	Carton 1265mm (W) x 680mm (D) x 790mm (H)								
	ACCESSORIES	_								
Δ	OPERATING CONDITIONS	Ambient Temperature: 5-38°C Voltage Range: Rated Voltage±6%								
	*We reserve the right to make changes in specifications and design without prior no									

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to
- meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).

 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 38°C and power supply of 230V 50Hz.

 The amperage and electric consumption are based on magazine at ambient temperature of 38°C. on measurements at ambient temperature of 38°C
- and power supply of 230V 50Hz.

 3. The cabinet temperature range of -6 to 12°C is guaranteed at ambient temperature of 35°C.

 4. Product code: T264-C110 (HS)

APPRON NAGAS			ECKED ANG	DESIGNED SHAN		AWN HAN	SCALE 1	/20	TRIGONOMETRY	
LIUYIB0			Ą	2021.03.09 D		DATE	2.04.00	DRAWING NO.		SYMBOL
APPROVED			SYMBOL	DATE		2020	0.04.02	D28358		