




HOSHIZAKI

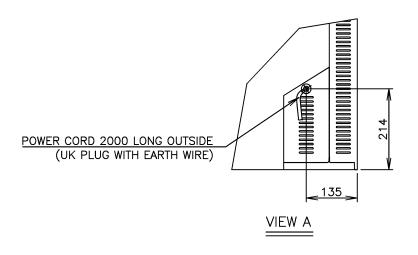





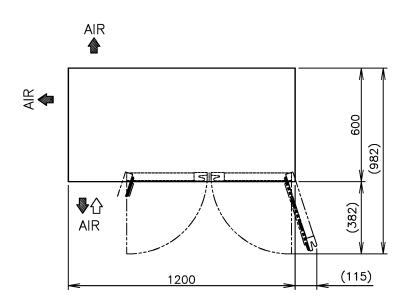

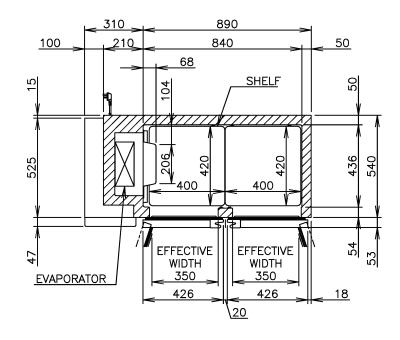

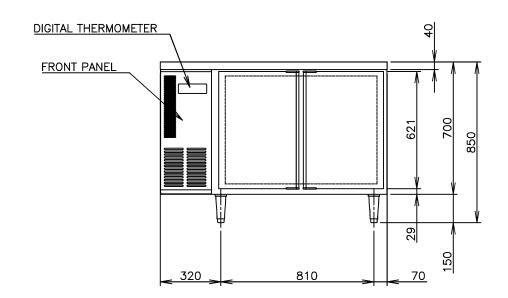

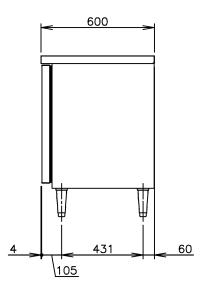

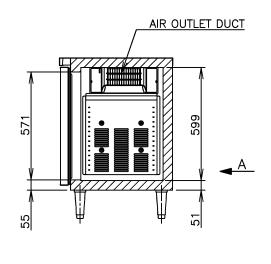

	ITEM	Hoshizaki Undercounter Refrigerator						
	MODEL	RT-126MA-S						
2	POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.5kVA (2.5A)						
	AMPERAGE	Rated 2.0A						
2	ELECTRIC CONSUMPTION	Motor 240W Heater 192W Refrigeration 245W Defrost 165W						
	HEAT REJECTION	*W						
	POWER CORD	2.0m (UK Plug with Earth Wire)						
	EFFECTIVE CAPACITY	231L						
	OUTSIDE DIMENSIONS	1200mm (W) x 600mm (D) x 850(-880) mm (H						
	INSIDE DIMENSIONS							
	EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)						
	INTERIOR	Stainless Steel, ABS Plastic (Door)						
	INSULATION	Polyurethane Foam						
	INSULATION FOAM BLOWING AGENT	Cyclopentane						
	REFRIGERATION SYSTEM	Forced Air Circulation						
	DEFROST SYSTEM	Glass Tube Heater						
	COMPRESSOR							
	CONDENSER	Wire and Tube type, Air—cooled						
	EVAPORATOR	Fin and Tube Type						
	REFRIGERANT	R134a						
	TEMPERATURE CONTROL	1 (3 1 / 3						
	DEFROST CONTROL	Microprocessor controlled						
	ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire						
	COMPRESSOR PROTECTION	Motor Protector						
	LEG	Plastic Adjustable 150 to 180mm						
	SHELF	4pcs.						
	WEIGHT	Net: 71kg (Gross: Approx. 76kg)						
	PACKAGE	Carton 1265mm (W) x 680mm (D) x 790mm (
	ACCESSORIES	_						
2	OPERATING CONDITIONS	Ambient Temperature: 5—38°C Voltage Range: Rated Voltage±6%						
	*We reserve the right t	o make changes in specifications and design without prior notice.						

*We reserve the right to make changes in specifications and design without prior notice.

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements(additional spacing is also required for proper air flow and pipe connections).
- 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 38°C and power supply of 230V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 38°C
- and power supply of 230V 50Hz.

 3. The cabinet temperature range of -6 to 12°C is guaranteed at ambient temperature of 35°C.

 4. Product code: T264-C100 (HS)

APPROVED (KAWAKAMI		ECKED 'ANG	DESIGNED LIANG	DRAWN ZHANG		SCALE 1	/ ₂₀ TRIGONOI		OMETRY
LIUYIB0					0.07.04	DRAWING NO. D24613		SYMBOL	
APPROVED				2019.03.01				[/2]	