HOSHIZAKI

IM-240PE-U-23

Cuber, Self Contained

Production Capacity (kg/24h) - AT 10°C, WT 10°C: 180
Storage bin capacity: 110 kg

ULTRACUBE SERIES

COUNTRY OF ORIGIN: UK




Hoshizaki IM-240PE-U-23 UltraCube model is a self-contained ice maker with UV-C sanitization function producing up to 180 kg of cube ice per 24 hours.

Ice cube dimensions and weight - disclaimer: The drawing is for illustration purposes only. Cube size and weight may be differ due to local installation conditions.

- Ice making system with an automatic rinse cycle
- Each ice cycle is made with fresh water
- Closed Cell System helps produce compact, hard and geometrically perfect ice
- Closed water circuit for contamination protection
- Easy external access to control panel
- UV sanitization function sanitizing air and water (UV-C irradiation)
- Internal drain pump is retrofittable
- System comes with a magnetic DC water pump with variable speed that has no direct coupling, which prevents any leakage
- Cleanable air filter
- Removable door gasket
- Easily removable water pan assembly

ICE TYPE: Medium cubes - 23



WARRANTY PERIOD	EXTERIOR
3 Years on Parts & Labour - based on country agreement	**Stainless steel AISI 441, Galvanized steel (Rear)**

Refrigerant type: R290 / Refrigerant: 0,147 kg /
CO2 equivalent: 0,441 kg

OPERATING CONDITIONS

Ambient temperature (minimum): 1 °C, Ambient temperature (maximum): 40 °C, Water supply pressure (minimum): 0.07MPa (0.7bar), Water supply pressure (maximum): 0.8MPa (8bar), Water supply temperature (minimum): 5 °C, Water supply temperature (maximum): 35 °C, Voltage range (Rated Voltage): ±6%



CERTIFICATIONS

ISO HOSHIZAKI • ISO 9001


CE

HACCP INTERNATIONAL FOOD SAFETY PROGRAM CERTIFICATION

NSF Certified Product to NSF REG4 83


ACCESSORIES INCLUDED

Installation kit, Legs, Scoop



HOSHIZAKI

IM-240PE-U-23

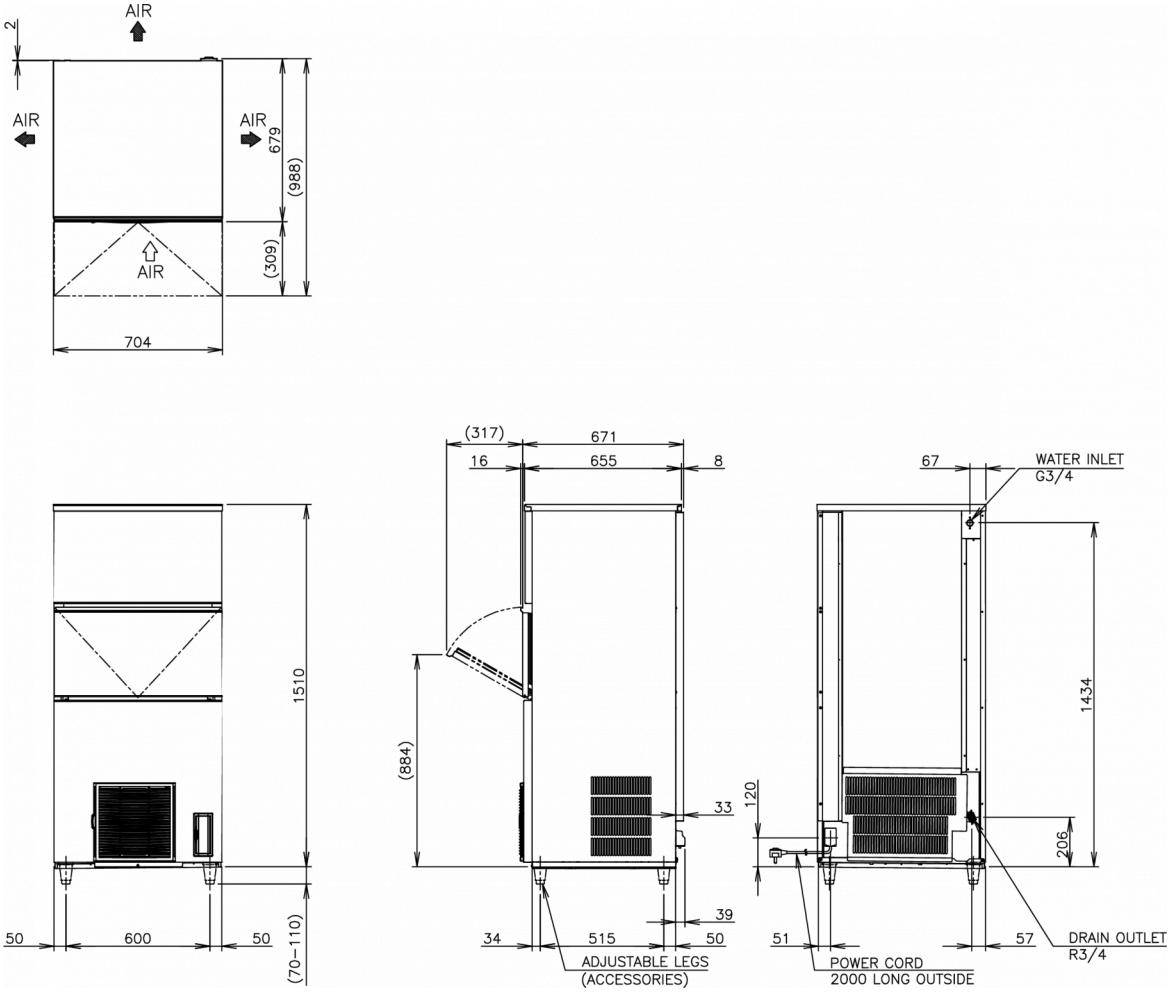

TECHNICAL SPECIFICATIONS

Cooling system	Power supply	Electric Consumption	Electrical circuit breaker protection	Heat Rejection (AT 32°C, WT 21°C)	Production Capacity (kg/24h) - AT 10°C, WT 10°C	Production Capacity (kg/24h) - AT 21°C, WT 15°C	Production Capacity (kg/24h) - AT 32°C, WT 21°C	Water consumption (m3/24h) - AT 10°C, WT 10°C
Air Cooled	1/220 - 240V/50Hz	0,87 kW	5 A	2,58 kW	180	175	145	0,68

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Dimensions legs	Net weight
805 mm	760 mm	1.684 mm	1,03 m3	114 kg	704 mm	665 mm	1.510 mm	for legs add 70-110mm	101 kg

HOSHIZAKI HONG KONG CO., LTD.

Showroom and Customer Service Centre
Unit G, 17/F, World Tech Centre,
95 How Ming Street,
Kwun Tong, Kowloon,
Hong Kong

Sales WhatsApp : 6125 3635
Service WhatsApp : 6160 2108
Email: info@hoshizaki.com.hk
www.hoshizaki.com.hk

WEBSITE FACEBOOK INSTAGRAM