HOSHIZAKI

IM-240XPE-U-23

Cuber, Modular & Stackable (extension)

Production Capacity (kg/24h) - AT 10°C, WT 10°C: 180

ULTRACUBE SERIES

COUNTRY OF ORIGIN: UK


Hoshizaki IM-240XPE-U-23 UltraCube model is a modular and stackable (extension) ice maker with UVC sanitization function producing up to 180 kg of cube ice per 24 hours. This model is compatible with Hoshizaki storage bins.

Ice cube dimensions and weight - disclaimer: The drawing is for illustration purposes only. Cube size and weight may differ due to local installation conditions.

- Ice making system with an automatic rinse cycle.
- Each ice cycle is made with fresh water.
- Closed water circuit for contamination protection.
- Closed Cell System helps produce compact, hard and geometrically perfect ice.
- Easy external access to control panel.
- System comes with a magnetic DC water pump with variable speed and that has no direct coupling, which prevents any leakage.
- UV sanitization function sanitizing air and water (UV-C irradiation).
- Cleanable air filter.
- Stainless steel frame inside.
- Easily removable water pan assembly.
- A maximum of 3 units are stackable: 1 x DPE + 2 x XPE.



ICE TYPE: Medium cubes - 23

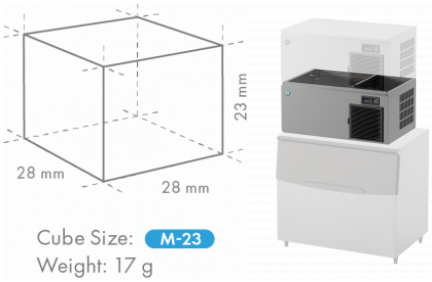



WARRANTY PERIOD

3 Years on Parts & Labour - based on country agreement

EXTERIOR

Stainless steel AISI 441, Galvanized steel (Rear)

Refrigerant type: R290 / Refrigerant: 0,147 kg / CO2 equivalent: 0,441 kg

OPERATING CONDITIONS

Ambient temperature (minimum): 1 °C, Ambient temperature (maximum): 40 °C, Water supply pressure (minimum): 0.07MPa (0.7bar), Water supply pressure (maximum): 0.8MPa (8bar), Water supply temperature (minimum): 5 °C, Water supply temperature (maximum): 35 °C, Voltage range (Rated Voltage): ±6%

CERTIFICATIONS

ISO HOSHIZAKI • ISO 9001

CE

HACCP INTERNATIONAL FOOD SAFETY PROGRAM CERTIFICATION

NSF Certified Product to NSF REG4 83


closed CELL

ACCESSORIES INCLUDED

Installation kit, Legs, Scoop

HOSHIZAKI

IM-240XPE-U-23

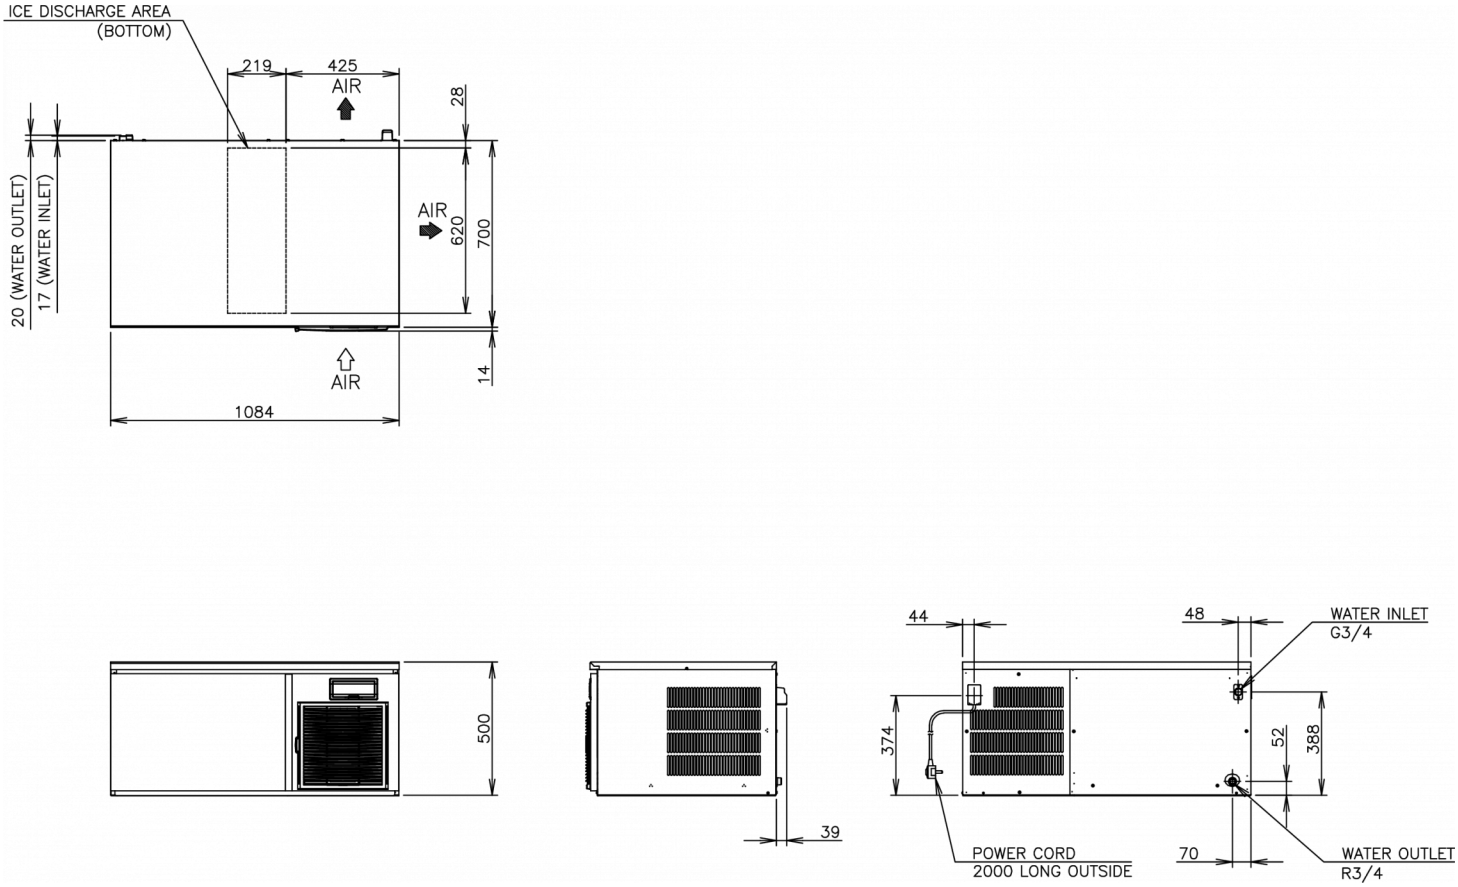

TECHNICAL SPECIFICATIONS

Cooling system	Power supply	Electric Consumption	Electrical circuit breaker protection	Heat Rejection (AT 32°C, WT 21°C)	Production Capacity (kg/24h) - AT 10°C, WT 10°C	Production Capacity (kg/24h) - AT 21°C, WT 15°C	Production Capacity (kg/24h) - AT 32°C, WT 21°C	Water consumption (m3/24h) - AT 10°C, WT 10°C
Air Cooled	1/220 - 240V/50Hz	0,87 kW	5 A	2,25 kW	180	175	155	0,73

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Net weight
1.196 mm	825 mm	640 mm	0,632 m3	84 kg	1.084 mm	700 mm	500 mm	71 kg

HOSHIZAKI HONG KONG CO., LTD.

Showroom and Customer Service Centre
Unit G, 17/F, World Tech Centre,
95 How Ming Street,
Kwun Tong, Kowloon,
Hong Kong

Sales WhatsApp : 6125 3635
Service WhatsApp : 6160 2108
Email: info@hoshizaki.com.hk
www.hoshizaki.com.hk

WEBSITE FACEBOOK INSTAGRAM