HOSHIZAKI

# IM-240XPE-U

## Cuber, Modular & Stackable (extension)

**Production Capacity (kg/24h) - AT 10°C, WT 10°C: 210**

ULTRACUBE SERIES

COUNTRY OF ORIGIN: UK


Hoshizaki IM-240XPE-U UltraCube model is a modular and stackable (extension) ice maker with UVC sanitization function producing up to 210 kg of cube ice per 24 hours. This model is compatible with Hoshizaki storage bins.

Ice cube dimensions and weight - disclaimer: The drawing is for illustration purposes only. Cube size and weight may differ due to local installation conditions.

- Ice making system with an automatic rinse cycle.
- Each ice cycle is made with fresh water.
- Closed water circuit for contamination protection.
- Closed Cell System helps produce compact, hard and geometrically perfect ice.
- Easy external access to control panel.
- System comes with a magnetic DC water pump with variable speed and that has no direct coupling, which prevents any leakage.
- UV sanitization function sanitizing air and water (UV-C irradiation).
- Cleanable air filter.
- Stainless steel frame inside.
- Easily removable water pan assembly.
- A maximum of 3 units are stackable: 1 x DPE + 2 x XPE.



**ICE TYPE: Large cubes, Standard**

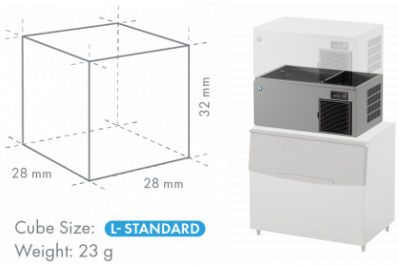




**WARRANTY PERIOD**

**3 Years on Parts & Labour - based on country agreement**

**EXTERIOR**

**Stainless steel AISI 441, Galvanized steel (Rear)**

Refrigerant type: R290 / Refrigerant: 0,147 kg / CO2 equivalent: 0,441 kg

**OPERATING CONDITIONS**

Ambient temperature (minimum): 1 °C, Ambient temperature (maximum): 40 °C, Water supply pressure (minimum): 0.07MPa (0.7bar), Water supply pressure (maximum): 0.8MPa (8bar), Water supply temperature (minimum): 5 °C, Water supply temperature (maximum): 35 °C, Voltage range (Rated Voltage): ±6%


CERTIFICATIONS

ISO HOSHIZAKI • ISO 9001

CE

HACCP INTERNATIONAL FOOD SAFETY PROGRAM CERTIFICATION

NSF Certified Product to NSF REG4 53





## ACCESSORIES INCLUDED

Installation kit, Legs, Scoop

HOSHIZAKI

# IM-240XPE-U

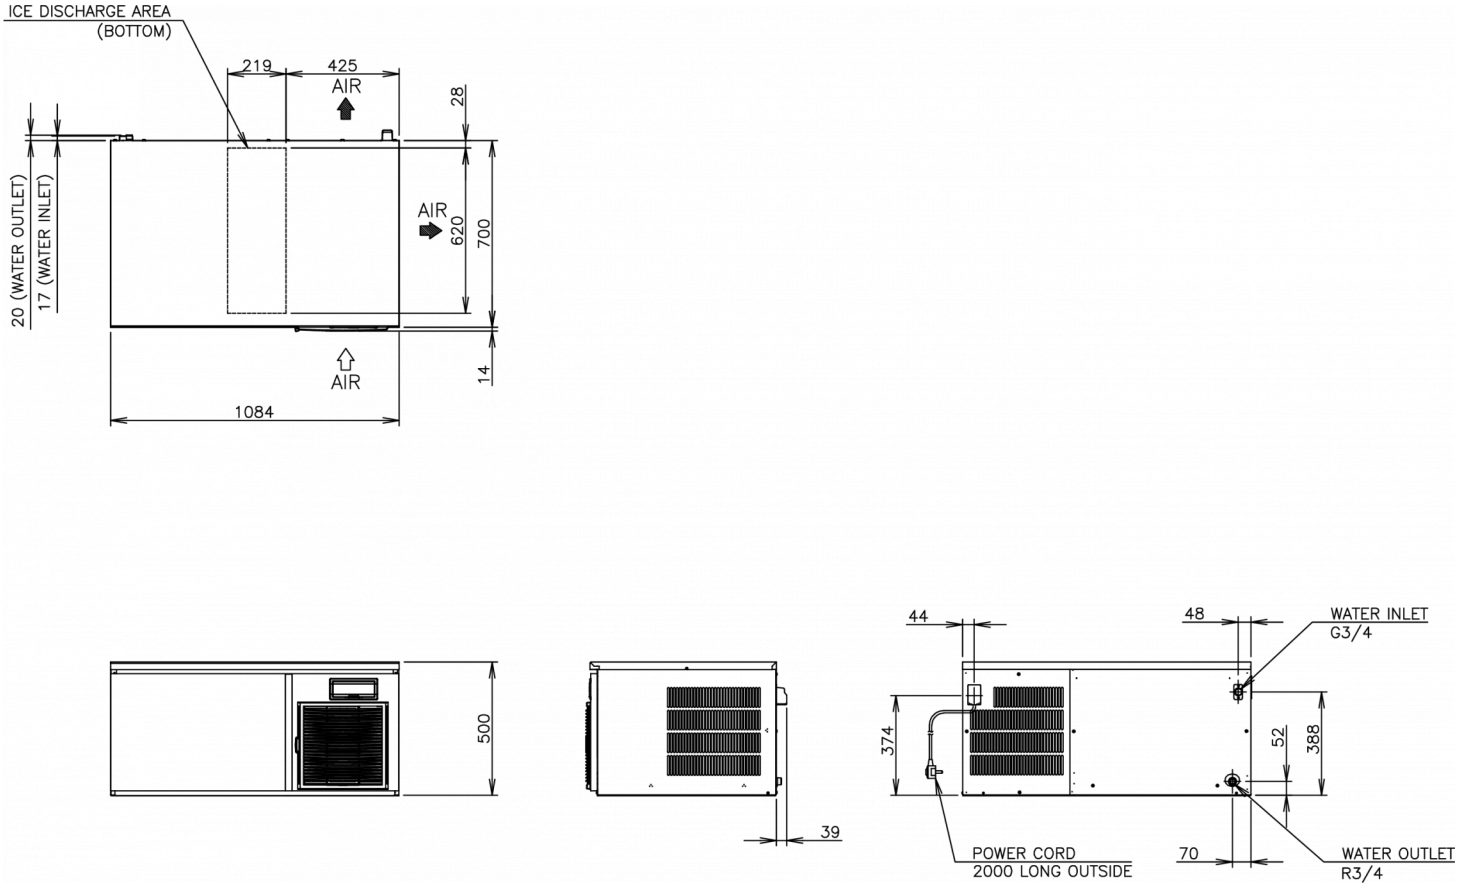


## TECHNICAL SPECIFICATIONS

| Cooling system | Power supply | Electric Consumption | Electrical circuit breaker protection | Heat Rejection (AT 32°C, WT 21°C) | Production Capacity (kg/24h) - AT 10°C, WT 10°C | Production Capacity (kg/24h) - AT 21°C, WT 15°C | Production Capacity (kg/24h) - AT 32°C, WT 21°C | Water consumption (m3/24h) - AT 10°C, WT 10°C |
|---|---|---|---|---|---|---|---|---|
| Air Cooled | 1/220 - 240V/50Hz | 0,845 kW | 5 A | 2,25 kW | 210 | 195 | 175 | 0,67 |

## SHIPPING SPECIFICATIONS

| Width (packed) | Depth (packed) | Height (packed) | Volume (packed) | Gross weight | Width | Depth | Height | Net weight |
|---|---|---|---|---|---|---|---|---|
| 1.196 mm | 825 mm | 640 mm | 0,632 m3 | 93 kg | 1.084 mm | 700 mm | 500 mm | 78 kg |


HOSHIZAKI HONG KONG CO., LTD.

Showroom and Customer Service Centre
Unit G, 17/F, World Tech Centre,
95 How Ming Street,
Kwun Tong, Kowloon,
Hong Kong

Sales WhatsApp : 6125 3635
Service WhatsApp : 6160 2108
Email: info@hoshizaki.com.hk
www.hoshizaki.com.hk


WEBSITE FACEBOOK INSTAGRAM