HOSHIZAKI

IM-65PE-U

Cuber, Self Contained

Production Capacity (kg/24h) - AT 10°C, WT 10°C: 58
Storage bin capacity: 26 kg

ULTRACUBE SERIES

COUNTRY OF ORIGIN: UK




Hoshizaki IM-65PE-U UltraCube model is a self-contained ice maker producing up to 58 kg of cube ice per 24 hours.

Ice cube dimensions and weight - disclaimer: The drawing is for illustration purposes only. Cube size and weight may differ due to local installation conditions.

- Ice production per cycle: 1.05kg / 42pcs
- Ice making system with an automatic rinse cycle
- Each ice cycle is made with fresh water
- Closed Cell System helps produce compact, hard and geometrically perfect ice
- Closed water circuit for contamination protection
- Easy external access to control panel
- UV sanitization function sanitizing air and water (UV-C irradiation)
- Internal drain pump is retrofittable by a qualified engineer
- System comes with a magnetic DC water pump for internal ice production with variable speed that has no direct coupling, which prevents any leakage
- Cleanable air filter
- Removable door gasket
- Easily removable water pan assembly

ICE TYPE: Large cubes, Standard





WARRANTY PERIOD	EXTERIOR
3 Years on Parts & Labour - based on country agreement	**Stainless steel AISI 441, Galvanized steel (Rear)**

Refrigerant type: R290 / Refrigerant: 0,11 kg / CO2 equivalent: 0,33 kg

OPERATING CONDITIONS

Ambient temperature (minimum): 1 °C, Ambient temperature (maximum): 40 °C, Water supply pressure (minimum): 0.07MPa (0.7bar), Water supply pressure (maximum): 0.8MPa (8bar), Water supply temperature (minimum): 5 °C, Water supply temperature (maximum): 35 °C, Voltage range (Rated Voltage): ±6%


CERTIFICATIONS

ISO HOSHIZAKI • ISO 9001

CE

HACCP INTERNATIONAL FOOD SAFETY PROGRAM CERTIFICATION

NSF Certified Product to NSF REG4 83




ACCESSORIES INCLUDED

Installation kit, Legs, Scoop

HOSHIZAKI

IM-65PE-U

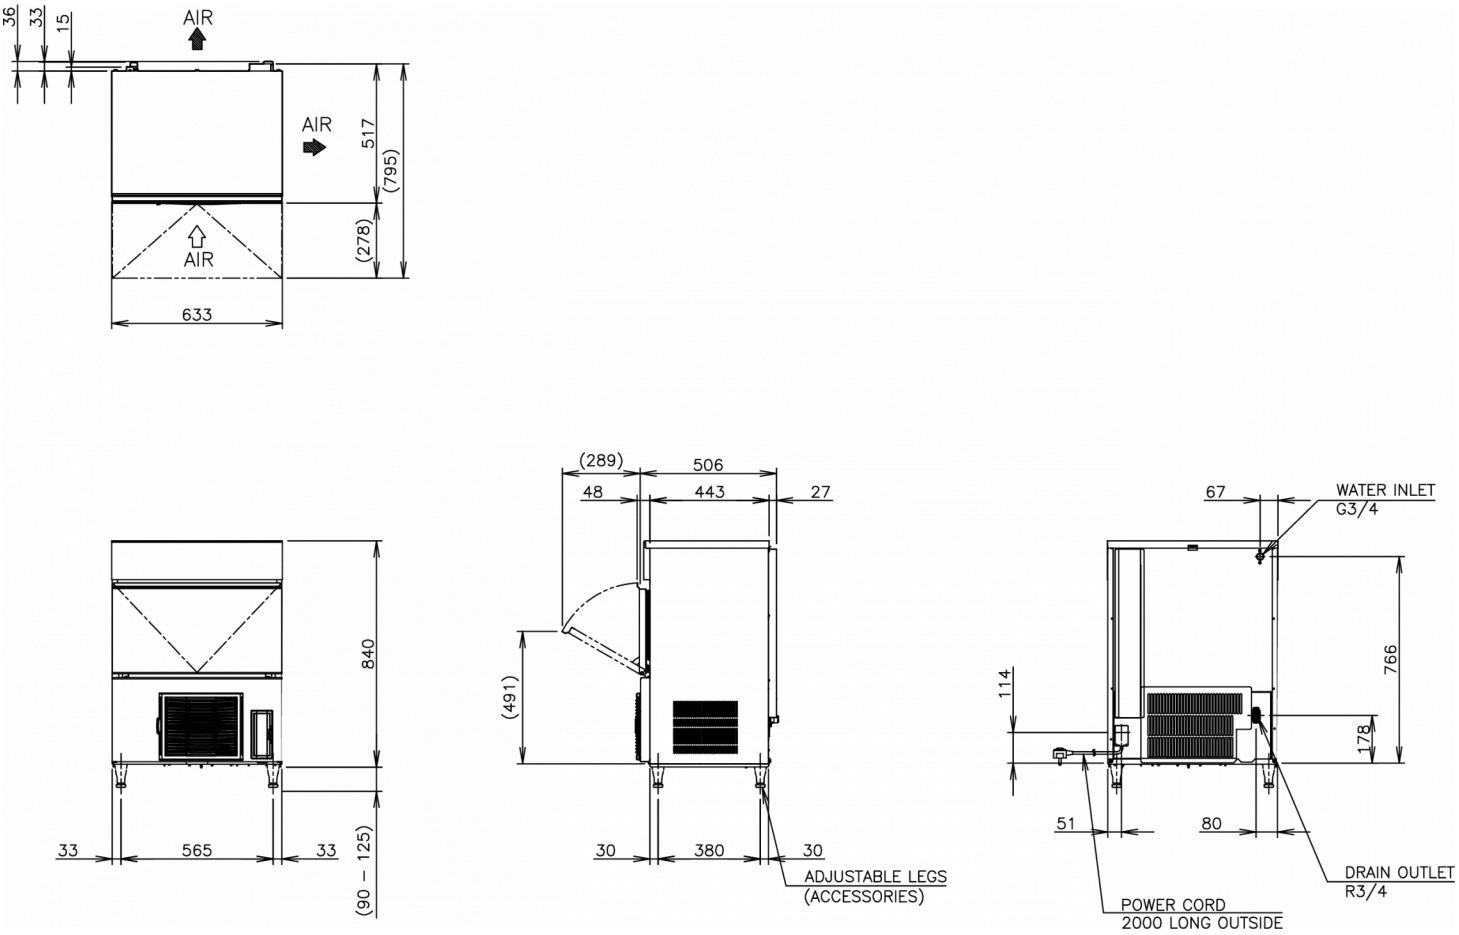

TECHNICAL SPECIFICATIONS

Cooling system	Power supply	Electric Consumption	Electrical circuit breaker protection	Heat Rejection (AT 32°C, WT 21°C)	Production Capacity (kg/24h) - AT 10°C, WT 10°C	Production Capacity (kg/24h) - AT 21°C, WT 15°C	Production Capacity (kg/24h) - AT 32°C, WT 21°C	Water consumption (m3/24h) - AT 10°C, WT 10°C
Air Cooled	1/220 - 240V/50Hz	0,29 kW	5 A	0,83 kW	58	53	43	0,43

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Dimensions legs	Net weight
735 mm	570 mm	1.012 mm	0,424 m3	58 kg	633 mm	506 mm	840 mm	for legs add 90-125 mm	48 kg

HOSHIZAKI HONG KONG CO., LTD.

Showroom and Customer Service Centre
Unit G, 17/F, World Tech Centre,
95 How Ming Street,
Kwun Tong, Kowloon,
Hong Kong

Sales WhatsApp : 6125 3635
Service WhatsApp : 6160 2108
Email: info@hoshizaki.com.hk
www.hoshizaki.com.hk

WEBSITE FACEBOOK INSTAGRAM