



EQ-4101 様式-27


## **HOSHIZAKI**

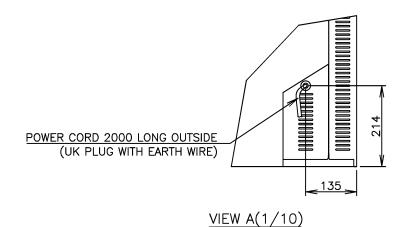





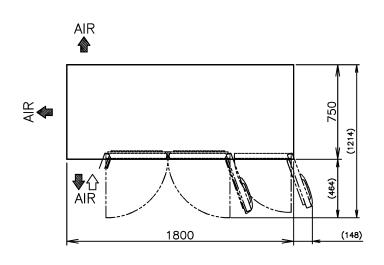

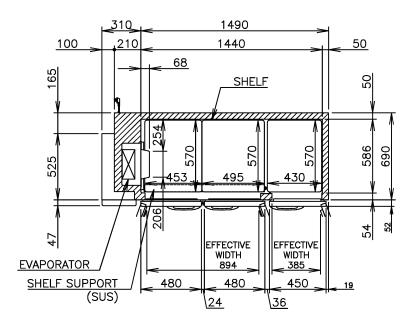

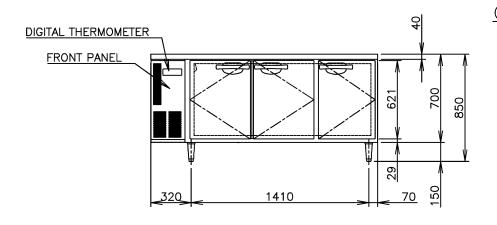





	ITEM	Hoshizaki Undercounter Refrigerator
	MODEL	RT-188MA-S-ML
◬	POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.67kVA (3.05A)
	AMPERAGE	Rated 2.1A
$\Delta$	ELECTRIC CONSUMPTION	Motor 270W Heater 201W
	ELECTRIC CONSONII HON	Refrigeration 280W Defrost 165W
	POWER CORD	2.0m (UK Plug with Earth Wire)
	EFFECTIVE CAPACITY	502L
	OUTSIDE DIMENSIONS	1800mm (W) x 750mm (D) x 850(-880)mm (H)
	INSIDE DIMENSIONS	1440mm (W) x 586mm (D) x 599mm (H)
	EXTERIOR	Stainless Steel, Galvanized Steel (Rear / Bottom) ABS Plastic (Top & Bottom on Door)
	INTERIOR	Stainless Steel, ABS Plastic (Door)
	INSULATION	Polyurethane Foam
	INSULATION FOAM BLOWING AGENT	Cyclopentane
	REFRIGERATION SYSTEM	Forced Air Circulation
	DEFROST SYSTEM	Glass Tube Heater
	COMPRESSOR	Hermetic
	CONDENSER	Wire and Tube type, Air—cooled
	EVAPORATOR	Fin and Tube Type
	REFRIGERANT	R134a
	TEMPERATURE CONTROL	Microprocessor controlled Adjustable from −6 to 12°C
	DEFROST CONTROL	Microprocessor controlled
	ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
	COMPRESSOR PROTECTION	Motor Protector
	LEG	Plastic Adjustable 150 to 180mm
	SHELF	6pcs.
$\Delta$	WEIGHT	Net:102kg (Gross: Approx. 107kg)
	PACKAGE	Carton 1865mm (W) x 830mm (D) x 790mm (H)
	ACCESSORIES	
Δ	OPERATING CONDITIONS	Ambient Temperature: 5-38°C
ļ	*We reserve the right t	Voltage Range: Rated Voltage±6% omake changes in specifications and design without prior notice.
we reserve the right to make changes in specifications and design without prior notice.		

\*We reserve the right to make changes in specifications and design without prior notice.

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow). pipe connections).
- 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 38°C and power supply of 230V 50Hz.
  The amperage and electric consumption are based on measurements at ambient temperature of 40°C and power supply of 230V 50Hz.

  3. The cabinet temperature range of -6 to 12°C is
- guaranteed at ambient temperature of 35°C. 4. Product code: T270-C110 (HS)